


- 1 Tubular motor
- 2 Shutter motor
(Industrial rolling door, Fire proof shutter)
- 3 Automatic bollard
- 4 Road blocker
- 5 Curtain motor
- 6 Industrial door opener

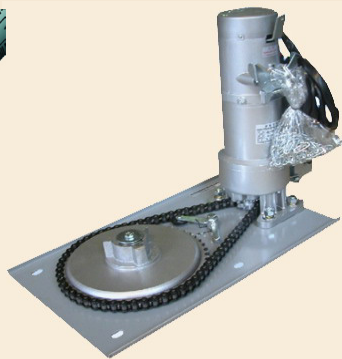


33.ISO

工业翻板门电机


Industrial sectional door opener

机械限位，高精度，调节方便
运行平衡，噪音低，带手动链条
Mechanical Limit Switch,
high precision,easy adjust.
Balanced runing ,low noice ,with manual chain

产品认证 Product Certificate

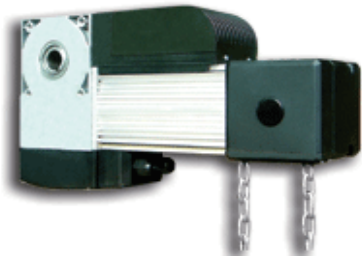

| | | | |
|---|---------------------------------------|---------------------------------------|---------------------------------------|
| Model: | 33.ISO.50.SP | 33.ISO.75.SP | 33.ISO.100.TP |
| Power supply : | 220V | 220V | 380V |
| Motor power: | 450W | 550W | 750W |
| Capacitor : | 30uF | 35uF | --- |
| Thermal protection : | 120 ℃ | 120 ℃ | 120 ℃ |
| Max output torque: | 50 N.m | 75 N.m | 100 N.m |
| Output rotational speed: | 23 RPM | 23RPM | 23 RPM |
| weight of door(when the spring keep balance): | 80Kg | 100Kg | 120Kg |
| Max square metre: | 15 m ² ~ 20 m ² | 20 m ² ~ 25 m ² | 25 m ² ~ 30 m ² |
| Max lift height | 5m | 5m | 5m |
| Output shaft size | ∅ 25.4 | ∅ 25.4 | ∅ 25.4 |

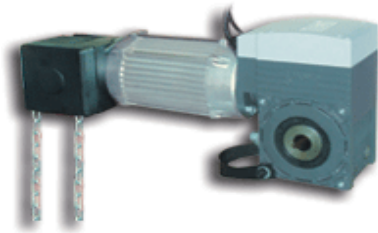

| | | |
|---|---------------------------------------|---------------------------------------|
| Model: | 33.ISO.150.TP | 33.ISO.400.TP |
| Power supply : | 380V | 380V |
| Motor power: | 1000W | 3000W |
| Capacitor : | --- | --- |
| Thermal protection : | 120 ℃ | 120 ℃ |
| Max output torque: | 150N.m | 400 N.m |
| Output rotational speed: | 21 RPM | 27RPM |
| weight of door(when the spring keep balance): | -- | --- |
| Max square metre: | 40 m ² ~ 50 m ² | 50 m ² ~ 70 m ² |
| Max lift height | 7m | 7m |
| Output shaft size | ∅ 25.4/31.8/35/40 | ∅ 31.8/35/40 |


33.IRO

工业卷门电机


Industrial rolling door opener

机械限位，高精度，调节方便
运行平衡，噪音低，带手动链条
Mechanical Limit Switch,
high precision,easy adjust.
Balanced runing ,low noise ,with manual chain

产品认证 Product Certificate

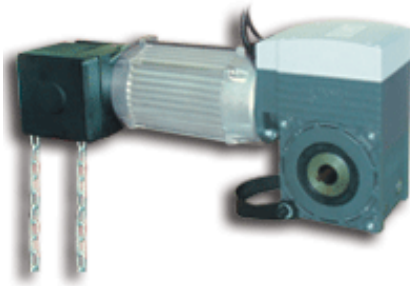

| | |
|---|---------------------------------------|
| Model: | 33.IRO.200.TP |
| Power supply : | 380V |
| Motor power : | 450W |
| Capacitor : | --- |
| Thermal protection : | 120 °C |
| Max output torque : | 200 N.m |
| Output rotational speed : | 19.2 RPM |
| weight of door(when the spring keep balance): | --- |
| Max square metre: | 40 m ² ~ 60 m ² |
| Max lift height | 7m |
| Output shaft size | ∅ 25.4 |

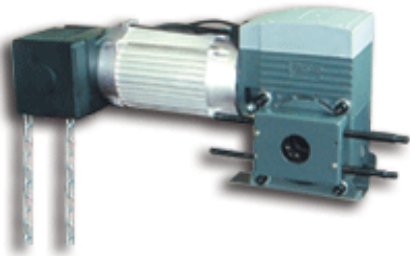

| | |
|---|---------------------------------------|
| Model: | 33.IRO.150.TP |
| Power supply : | 380V |
| Motor power : | 3000W |
| Capacitor : | --- |
| Thermal protection : | 120 °C |
| Max output torque : | 600N.m |
| Output rotational speed : | 24 RPM |
| weight of door(when the spring keep balance): | --- |
| Max square metre: | 40 m ² ~ 60 m ² |
| Max lift height | 7m |
| Output shaft size | ∅ 31.8 |

33.GDO

车库门电机

Garage door opener

Mechanical Limit Switch,

A manual release function allows easy manual operation in event of power failure.

Auto-closing and lock function is available.

With Interface for photocell , backup battery

Over load protection.

产品认证 Product Certificate



33.GDO.06A

| | |
|-----------------------|-------------------|
| Model: | 33.GDO.06A |
| Power supply : | 110/220V |
| Motor power: | 24V |
| Light : | 10W/24V |
| Working speed: | 12cm/s |
| Radio frequency : | 433.92MHz |
| Output torque: | 6Nm |
| Max. lifting height : | 2.0m |
| Max. lifting area: | 7.0m ² |
| Power of sleep mode: | <10W |
| Protection class : | IP20 |
| Working temperature: | 30℃-60℃ |



33.GDO.07B



33.GDO.08B

| | | |
|-----------------------|-------------------|-------------------|
| Model: | 33.GDO.07B | 33.GDO.08B |
| Power supply : | 110/220V | 110/220V |
| Motor power: | 24V | 24V |
| Light : | 10W/24V | 10W/24V |
| Working speed: | 12cm/s | 12cm/s |
| Radio frequency : | 433.92MHz | 433.92MHz |
| Output torque: | 7Nm | 8Nm |
| Max. lifting height : | 2.2m | 2.5m |
| Max. lifting area: | 8.0m ² | 9.0m ² |
| Power of sleep mode: | <10W | <10W |
| Protection class : | IP20 | IP20 |
| Working temperature: | 30℃-60℃ | 30℃-60℃ |

33.GDO

车库门电机

Garage door opener

Mechanical Limit Switch,

A manual release function allows easy manual operation in event of power failure.

Auto-closing and lock function is available.

With Interface for photocell , backup battery

Over load protection.

产品认证 Product Certificate



33.GDO.10B



33.GDO.12B

| | | |
|-----------------------|--------------------|--------------------|
| Model : | 33.GDO.10C | 33.GDO.12C |
| Power supply : | 110/220V | 110/220V |
| Motor power : | 24V | 24V |
| Light : | 10W/24V | 10W/24V |
| Working speed : | 12cm/s | 12cm/s |
| Radio frequency : | 433.92MHz | 433.92MHz |
| Output torque : | 7Nm | 8Nm |
| Max. lifting height : | 3.2m | 3.5m |
| Max. lifting area : | 12.0m ² | 15.0m ² |
| Power of sleep mode : | <10W | <10W |
| Protection class : | IP20 | IP20 |
| Working temperature : | 30℃-60℃ | 30℃-60℃ |



33.GDO.10D

| | | |
|-----------------------|-------------------|--------------------|
| Model : | 33.GDO.08D | 33.GDO.10D |
| Power supply : | 110/220V | 110/220V |
| Motor power : | 24V | 24V |
| Light : | 10W/24V | 10W/24V |
| Working speed : | 12cm/s | 12cm/s |
| Radio frequency : | 433.92MHz | 433.92MHz |
| Output torque : | 8Nm | 10Nm |
| Max. lifting height : | 2.5m | 3.2m |
| Max. lifting area : | 9.0m ² | 12.0m ² |
| Power of sleep mode : | <10W | <10W |
| Protection class : | IP20 | IP20 |
| Working temperature : | 30℃-60℃ | 30℃-60℃ |

33.GDO

车库门电机

Garage door opener

Automatically reverse safety system.

Computerised precision travel limit.

Soft start and soft stop -smooth and quiet opening and closing.

Auto Courtesy light.

5 levels Adjustable Force.

Optional safety beam sensors (recommended) stop the door before contact with an obstruction.

Force sensing systems constantly adapt to compensate for minor changes in door load from weather and door age .

Suitable for tilt-up and sectional overhead doors.

产品认证 Product Certificate



33.GDO.10E

| | | |
|-----------------------|-------------------|--------------------|
| Model : | 33.GDO.08E | 33.GDO.10E |
| Power supply : | 110/220V | 110/220V |
| Motor power : | 24V | 24V |
| Light : | 10W/24V | 10W/24V |
| Working speed : | 12cm/s | 12cm/s |
| Radio frequency : | 433.92MHz | 433.92MHz |
| Output torque : | 8Nm | 10Nm |
| Max. lifting height : | 2.5m | 3.2m |
| Max. lifting area : | 9.0m ² | 12.0m ² |
| Power of sleep mode : | <10W | <10W |
| Protection class : | IP20 | IP20 |
| Working temperature : | 30°C-60°C | 30°C-60°C |



33.GDO.10F

| | |
|-----------------------|-------------------|
| Model : | 33.GDO.08F |
| Power supply : | 110/220V |
| Motor power : | 24V |
| Light : | 10W/24V |
| Working speed : | 12cm/s |
| Radio frequency : | 433.92MHz |
| Output torque : | 8Nm |
| Max. lifting height : | 2.5m |
| Max. lifting area : | 9.0m ² |
| Power of sleep mode : | <10W |
| Protection class : | IP20 |
| Working temperature : | 30°C-60°C |



欲了解更多关于我们的产品，如卷帘窗产品，
门类产品，门类设备等。请点击我们的网站。

www.dafayard.com

Need any help or want to know more ,
please feel free to contact us or browse
our website :

www.dafayard.com

Tel: 0086-579-87540629

Fax:0086-579-87381229

Add: Huanwu Industrial Zone, Yongkang, China

E-mail:info@dafayard.com;

tony-yk01@hotmail.com

dafayard[®]
Motor products

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY
=ISO 9001/2000=