


电机产品
MOTORS DIVISION

- 1 Tubular motor
- 2 Shutter motor
(Industrial rolling door, Fire proof shutter)
- 3 Automatic bollard
- 4 Road blocker
- 5 Curtain motor
- 6 Industrial door opener

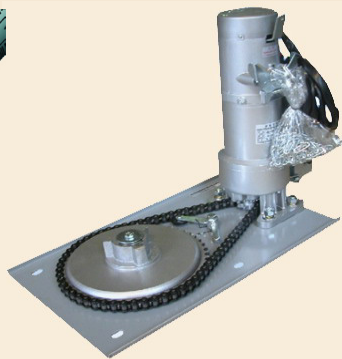


2010

33.SC

标准型电机

Standard Chain Type

标准型，机械限位，高精度，调节方便
运行平衡，噪音低，带手动链条
Standard type ,Mechanical Limit Switch,
high precision,easy adjust.
Balanced runing ,low noice ,with manual chain

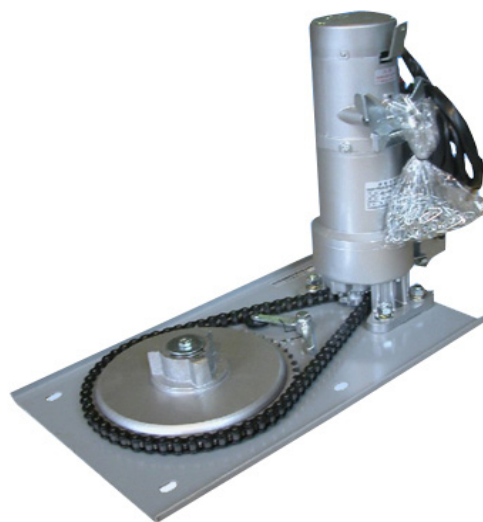

附件 Accessories



Control



Transmitter



Photocell



Sound alarm



control with lock



UPS

产品认证 Product Certificate



Type	Max. load (Kg.f)	Max. height (M)	Rated Voltage (V)	Rated Power (W)	Rate torque (Nm)	Max. roller size (MM)	Output speed (Rpm)	Weight (Kg)
220V/60HZ								
33.SC.150.SP	300	6.0	220	250	150	480	5.4	6.7
33.SC.310.SP	500	6.0	220	300	310	440	5.3	10.7
33.SC.370.SP	600	6.0	220	370	370	440	5.3	10.7
33.SC.595.SP	800	9.0	220	400	595	400/500	4.6	15.05
33.SC.745.SP	1000	9.0	220	400	745	460/600	4.4	15.1
380V/60HZ								
33.SC.1293.TP	1300	9.0	380	800	1293	600	5.2	21.8
33.SC.1492.TP	1500	9.0	380	800	1492	680	4.5	21.8

SC: Standard chain type

SP:Single phase

TP: Three phase

33.SC.DC

标准型电机

Standard Chain Type (DC)


标准型，机械限位，高精度，调节方便

运行平衡，噪音低，带手动链条

Standard type ,Mechanical Limit Switch,

high precision,easy adjust.

Balanced runing ,low noice ,with manual chain

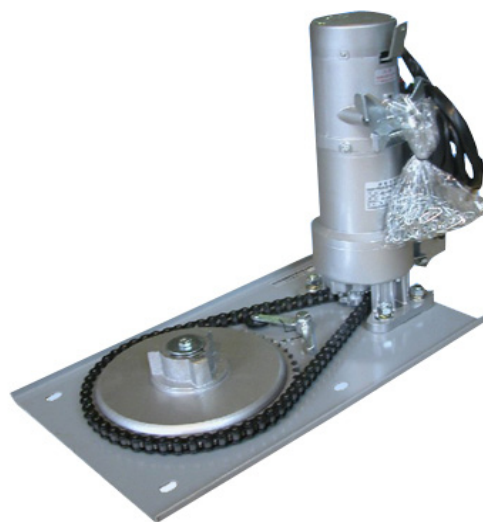

附件 Accessories



Control



Transmitter



Photocell



Sound alarm



control with lock



UPS

产品认证 Product Certificate



Type	Max. load (Kg.f)	Max. height (M)	Rated Voltage (V)	Rated Power (W)	Rate torque (Nm)	Max. roller size (MM)	Output speed (Rpm)	Weight (kg)
220V/50Hz/12V								
33.SC.150.DC	300	6.0	220	250	150	520	5.0	10.0
33.SC.370.DC	600	6.0	220	250	370	520	5.0	10.4

SC: Standard chain type


DC: Direct current

33.FC.TP

防火电机

Fire proof Chain Type

防火电机，机械限位，高精度，调节方便
运行平衡，噪音低，带手动链条
Fire proof type ,Mechanical Limit Switch,
high precision,easy adjust.
Balanced runing ,low noice ,with manual chain

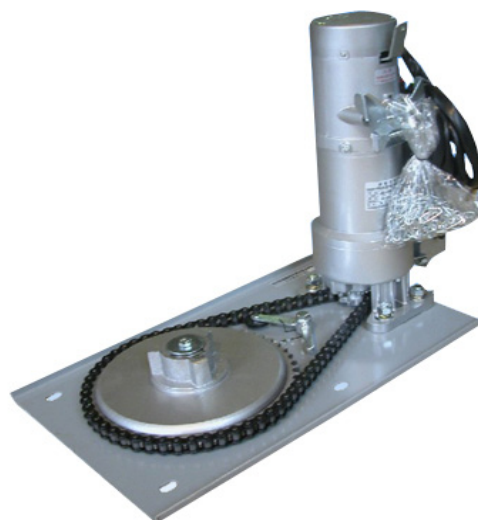

附件 Accessories



Control



Transmitter



Photocell



Sound alarm



Fire siren with
Strobe light



control with lock



UPS



Sensor



Control system

产品认证 Product Certificate



Type	Max. load (Kg.f)	Max. height (M)	Rated Voltage (V)	Rated Power (W)	Rate torque (Nm)	Max. roller size (MM)	Output speed (Rpm)	Weight (Kg)
380V/60HZ								
33.FC.370.TP	600	6.0	380	250	370	440	5.3	10.7
33.FC.595.TP	800	9.0	380	300	595	400/500	4.6	14.5
33.FC.745.TP	1000	9.0	380	300	745	460/600	4.4	14.7
33.FC.1293.TP	1300	9.0	380	800	1293	600	5.2	21.8
33.FC.1492.TP	1500	9.0	380	800	1492	680	4.5	21.8

FC: Fire proof chain type

SP:Single phase

TP: Three phase

33.SG

标准型电机

Standard Gear Type

标准齿轮型，机械限位，高精度，调节方便
运行平衡，噪音低，带手动链条
Standard gear type ,Mechanical Limit Switch,
high precision,easy adjust.
Balanced runing ,low noice ,with manual chain



附件 Accessories



Control



Transmitter



Photocell



Sound alarm



control with lock



UPS

产品认证 Product Certificate



Type	Max. load (Kg.f)	Max. height (M)	Rated Voltage (V)	Rated Power (W)	Rate torque (Nm)	Max. roller size (MM)	Output speed (Rpm)	Weight (Kg)
220V/60HZ								
33.SG.250.SP	300	6.0	220	250	150	480	5.4	6.7
33.SG.350.SP	500	6.0	220	300	310	440	5.3	10.7
33.SG.500.SP	600	6.0	220	370	370	440	5.3	10.7

SG: Standard gear type

SP:Single phase

TP: Three phase

33.DFC.TP

防火电机

Fire proof Double Curtain Type

防火电机，机械限位，高精度，调节方便
运行平衡，噪音低，带手动链条
Fire proof type ,Mechanical Limit Switch,
high precision,easy adjust.
Balanced runing ,low noice ,with manual chain



Roller Door
卷闸门

附件 Accessories



Control



Transmitter



Photocell



Sound alarm



Fire siren with
Strobe light



control with lock



UPS



Sensor



Control system

产品认证 Product Certificate



Type	Max. load (Kg.f)	Max. height (M)	Rated Voltage (V)	Rated Power (W)	Rate torque (Nm)	Max. roller size (MM)	Output speed (M/min)	Weight (Kg)
380V/60HZ								
33.FC.370.TP	600	6.0	380	250	370	440	3-6	10.7
33.FC.595.TP	800	9.0	380	300	595	400/500	3-6	14.5
33.FC.745.TP	1000	9.0	380	300	745	460/600	3-6	14.7
33.FC.1293.TP	1300	9.0	380	600	1293	600	3-6	21.8

33.BL

Automatic Bollard

Main Technical specifications

Operate mode: Pneumatic /hydraumatic

Power supply: 220V/380V

Column diameter: 168mm ~320mm

travel height: 600mm~700mm

Resistance to impact: 60000 Joule

Waterproof degree: IP66

De-watering requirement: 5L/min

Environment temperature: -20°C~60°C

Control model: push button/card reader/remote control/loop detector

Running speed: 5-9S (ascending)

Operation frequency: 120/h

Safety signs: reflective tape/LED warning light zipper/loop detector system traffic lights

Cylinder: stainless steel/plastic coating for steel tube



产品认证 Product Certificate



Type	Operation	Diameter (mm)	Material	Height of stroke (mm)	Run speed (s)	Ring flash	Reflective membrane	Protective rate
220V/380V								
33.BL.168	Semi-automatic	168	Stainless steel	600/700	5-9	Optional	Optional	IP66
33.BL.220.P	Pneumatic	220	Stainless steel/ Powder coating	600/700	5-9	Optional	Optional	IP66
33.BL.220.H	Hydraulic/ Live hydraulic	220	Stainless steel/ Powder coating	600/700	5-9	Optional	Optional	IP66
33.BL.273.P	Pneumatic	273	Stainless steel/ Powder coating	600/700	5-9	Optional	Optional	IP66
33.BL.273.H	Hydraulic/ Live hydraulic	273	Stainless steel/ Powder coating	600/700	5-9	Optional	Optional	IP66
33.BL.320.P	Pneumatic	320	Stainless steel/ Powder coating	600/700	5-9	Optional	Optional	IP66
33.BL.320.H	Hydraulic/ Live hydraulic	320	Stainless steel/ Powder coating	600/700	5-9	Optional	Optional	IP66

BL: bollard P: Pneumatic H:Hydraulic

33.BL

Road blocker



Technical specifications:

Power:1.5KW;
Normal temperature:-20℃;
Close time:<4S;Open time<3S;
Capacity<30Mts

产品认证 Product Certificate



Features:

- 1) Mainly used to control vehicles at customs, military bases, important government departments, airports, jails, nuclear power stations, docks and logistic centers.
- 2) Solid and enduring structure, strong bearing capacity
- 3) Perform exact control and operate reliability and stably
- 4) Able to adapt to the advance working environment under working temperature: -20- 50℃
- 5) Low-pressure hydraulic driving mode is used
- 6) Less trouble rate, high reliability, long service life, less and easy maintenance
- 7) Can combine with other control equipment to realize auto control
- 8) Manual operating mode is provided
- 9) In case of electric failure or trouble, it can manually operate the movable barrier to return to the horizontal position



欲了解更多关于我们的产品，如卷帘窗产品，
门类产品，门类设备等。请点击我们的网站。

www.dafayard.com

Need any help or want to know more ,
please feel free to contact us or browse
our website :

www.dafayard.com

Tel: 0086-579-87540629

Fax:0086-579-87381229

Add: Huanwu Industrial Zone, Yongkang, China

E-mail:info@dafayard.com;

tony-yk01@hotmail.com

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY
=ISO 9001/2000=