


电机产品
MOTORS DIVISION

- 1 Tubular motor
- 2 Shutter motor
(Industrial rolling door, Fire proof shutter)
- 3 Automatic bollard
- 4 Road blocker
- 5 Curtain motor
- 6 Industrial door opener

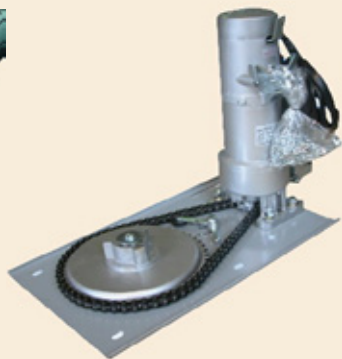

2010

专业研发制造从 $\varnothing 35\text{mm}$ 到 $\varnothing 92\text{mm}$ 全系列管状电机，开合帘电机，工业卷帘电机，防火电机。并且根据市场需求研发了高技术含量的机械限位内置接收型，电子限位内置接收型等。我们的电机为家用，商用，工业用途提供全方位的驱动解决方案。

Our motors includes tubular motors , Shutter motor ,Curtain motor,Automatic bollard, Road blocker in full series . Our products are well received in many markets because of realiable quality and attractive Chinese price including our mechanical limit swithc &built-in rceiver type , electronic limit switch & built in receiver type . We provide 360° overall drive solution for resident ,commercial , Industrial uses .

管状电机



电机编码说明Motor Code Instruction

32.45.AMER.40

-额定扭矩 (牛米) : Nominal Torque(Nm)

A: AC
D: DC
S: Standard Type
M: Manual function
R: Built in receiver function
C: Clutch function
E: Electronic limit switch function

管径 Tube Size

产品类别 Tubular motor code

32.35.AS

Ø35
Diameter 35mm

标准型电机 Standard Type Motor





标准型，机械限位

运行平稳，噪音低

Standard Type, Mechanical Limit Switch

Balanced running, low noise

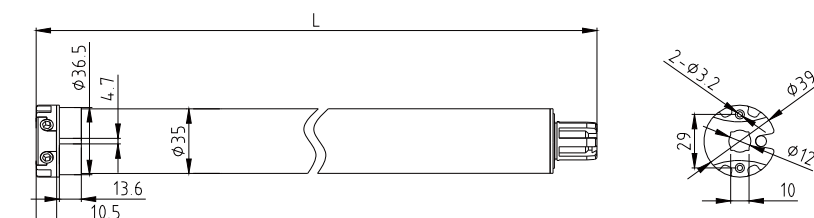

配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.35.AS.03	3	28	116	230	0.49	4	Ip44	520	40	1.34
32.35.AS.06	6	19	116	230	0.49	4	Ip44	520	40	1.34
32.35.AS.10	10	14	116	230	0.49	4	Ip44	520	40	1.35
110V/60Hz										
32.35.AS.03	3	34	116	110	1.51	4	Ip44	520	40	1.34
32.35.AS.06	6	23	116	110	1.51	4	Ip44	520	40	1.34
32.35.AS.10	10	17	116	110	1.51	4	Ip44	520	40	1.35

32.35.AR

Ø35
Diameter 35mm

机械限位内置接收型电机

Mechanical Limit Switch + Build-in Receiver Motor



机械限位内置接收型



运行平稳，噪音低

可外接手动开关

Mechanical Limit Switch + Build-in Receiver

Balanced running, low noise

Can connect with outer manual switch

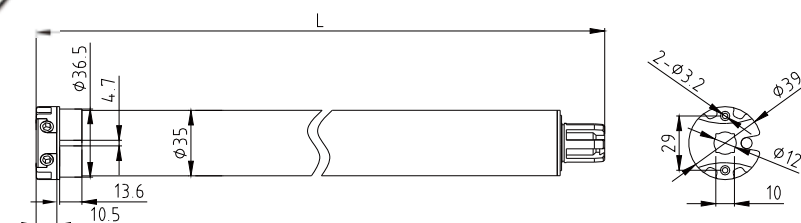

配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.35.AR.03	3	28	116	230	0.49	4	Ip44	660	40	1.40
32.35.AR.06	6	19	116	230	0.49	4	Ip44	660	40	1.40
32.35.AR.10	10	14	116	230	0.49	4	Ip44	660	40	1.41
110V/60Hz										
32.35.AR.03	3	34	116	110	1.51	4	Ip44	660	40	1.40
32.35.AR.06	6	23	116	110	1.51	4	Ip44	660	40	1.40
32.35.AR.10	10	17	116	110	1.51	4	Ip44	660	40	1.41

32.35.ARE

Ø35
Diameter 35mm

NEW

电子限位内置接收型电机

Electronic Limit Switch + Build-in Receiver Motor

电子限位内置接收型

运行平稳，噪音低

发射器无线遥控设定限位，限位精确



可外接手动开关

Electronic Limit Switch + Build-in Receiver


Balanced running, low noise

Wireless set up the limits by outer emitter with high precision

Can connect with outer manual switch

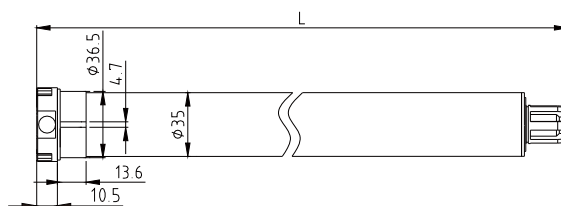Venetian Blind
百叶帘Projection Screen
投影屏幕Roller Shutter
卷帘窗Roller Blind
布艺卷帘

配件选择 Mount Solutions



产品认证 Product Certificate




Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.35.ARE.03	3	28	116	230	0.49	4	Ip44	560	0~∞	1.34
32.35.ARE.06	6	19	116	230	0.49	4	Ip44	560	0~∞	1.34
32.35.ARE.10	10	14	116	230	0.49	4	Ip44	560	0~∞	1.35
110V/60Hz										
32.35.ARE.03	3	34	116	110	1.51	4	Ip44	560	0~∞	1.34
32.35.ARE.06	6	23	116	110	1.51	4	Ip44	560	0~∞	1.34
32.35.ARE.10	10	17	116	110	1.51	4	Ip44	560	0~∞	1.35

Ø 45
Diameter 45mm

标准型电机

Standard Type Motor

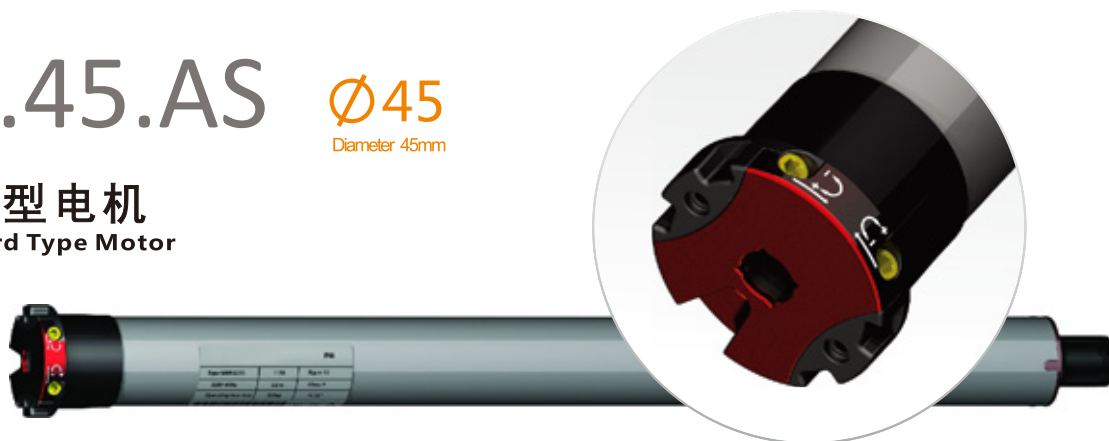


标准型，机械限位



运行平稳，噪音低

Standard Type, Mechanical Limit Switch

Balanced running, low noise



配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.AS.10	10	13	136	230	0.60	4	Ip44	570	40	2.25
32.45.AS.10	10	17	155	230	0.68	4	Ip44	570	40	2.30
32.45.AS.10	10	27	203	230	0.84	4	Ip44	570	40	2.40
32.45.AS.15	15	13	155	230	0.68	4	Ip44	570	40	2.28
32.45.AS.15	15	17	174	230	0.72	4	Ip44	570	40	2.35
32.45.AS.15	15	27	226	230	0.95	4	Ip44	570	40	2.40
32.45.AS.20	20	13	155	230	0.68	4	Ip44	570	40	2.30
32.45.AS.20	20	17	203	230	0.84	4	Ip44	570	40	2.40
32.45.AS.20	20	27	244	230	1.06	4	Ip44	570	40	2.60
32.45.AS.25	25	13	174	230	0.72	4	Ip44	570	40	2.35
32.45.AS.25	25	17	226	230	0.95	4	Ip44	570	40	2.40
32.45.AS.30	30	13	203	230	0.84	4	Ip44	570	40	2.40
32.45.AS.30	30	17	226	230	0.95	4	Ip44	570	40	2.42
32.45.AS.35	35	13	226	230	0.95	4	Ip44	570	40	2.42
32.45.AS.40	40	13	226	230	0.95	4	Ip44	570	40	2.45
32.45.AS.50	50	13	244	230	1.06	4	Ip44	570	40	2.60

110V/60Hz

32.45.AS.10	10	16	140	110	1.26	4	Ip44	570	40	2.25
32.45.AS.10	10	21	160	110	1.55	4	Ip44	570	40	2.30
32.45.AS.15	15	16	155	110	1.26	4	Ip44	570	40	2.28
32.45.AS.15	15	21	190	110	1.55	4	Ip44	570	40	2.35
32.45.AS.20	20	16	190	110	1.55	4	Ip44	570	40	2.30
32.45.AS.20	20	21	220	110	1.99	4	Ip44	570	40	2.40
32.45.AS.25	25	16	190	110	1.55	4	Ip44	570	40	2.35
32.45.AS.25	25	21	220	110	1.99	4	Ip44	570	40	2.40
32.45.AS.30	30	16	220	110	1.99	4	Ip44	570	40	2.40
32.45.AS.30	30	21	240	110	2.42	4	Ip44	570	40	2.42
32.45.AS.35	35	16	240	110	1.99	4	Ip44	570	40	2.42
32.45.AS.40	40	16	240	110	2.14	4	Ip44	570	40	2.45
32.45.AS.50	50	16	255	110	2.42	4	Ip44	570	40	2.60

32.45.ASS

Ø 45
Diameter 45mm

标准型短电机

Standard Super Short Motor



标准型短电机，机械限位，


运行平稳，噪音低

Standard Short Type , Mechanical Limit Switch


Balanced running, low noise



Roller Shutter
卷帘窗

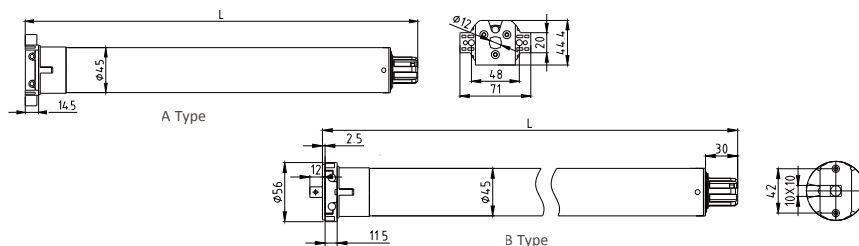

配件选择 Mount Solutions



产品认证 Product Certificate




Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Protection Index 保护等级	Running Time 连续工作时间 (min)	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.ASS.10-A	10	17	155	230	0.68	Ip44	4	450	27	1.75
32.45.ASS.15-A	15	13	155	230	0.68	Ip44	4	460	27	1.78
32.45.ASS.15-A	15	17	174	230	0.72	Ip44	4	470	27	1.78
32.45.ASS.20-A	20	13	155	230	0.68	Ip44	4	470	27	1.80
32.45.ASS.20-A	20	17	203	230	0.84	Ip44	4	480	27	1.80
32.45.ASS.25-A	25	13	174	230	0.72	Ip44	4	480	27	1.85
32.45.ASS.10-B	10	13	136	230	0.60	Ip44	4	360	12	1.75
32.45.ASS.10-B	10	17	155	230	0.68	Ip44	4	370	12	1.75
32.45.ASS.15-B	15	13	155	230	0.68	Ip44	4	370	12	1.78
32.45.ASS.15-B	15	17	174	230	0.72	Ip44	4	380	12	1.78
32.45.ASS.20-B	20	13	155	230	0.68	Ip44	4	370	12	1.80
32.45.ASS.20-B	20	17	203	230	0.84	Ip44	4	390	12	1.80
110V/60Hz										
32.45.ASS.10-A	10	21	160	110	1.55	Ip44	4	420/400	27	1.75
32.45.ASS.15-A	15	16	155	110	1.26	Ip44	4	430/410	27	1.78
32.45.ASS.15-A	15	21	190	110	1.55	Ip44	4	440/420	27	1.78
32.45.ASS.20-A	20	16	190	110	1.55	Ip44	4	440/410	27	1.80
32.45.ASS.20-A	20	21	220	110	1.99	Ip44	4	450/430	27	1.80
32.45.ASS.25-A	25	16	190	110	1.55	Ip44	4	440/420	27	1.85
32.45.ASS.10-B	10	16	140	110	1.26	Ip44	4	350/360	12	1.75
32.45.ASS.10-B	10	21	160	110	1.55	Ip44	4	360/370	12	1.75
32.45.ASS.15-B	15	16	155	110	1.26	Ip44	4	360/370	12	1.78
32.45.ASS.15-B	15	21	190	110	1.55	Ip44	4	370/380	12	1.78
32.45.ASS.20-B	20	16	190	110	1.55	Ip44	4	360/370	12	1.80
32.45.ASS.20-B	20	21	220	110	1.99	Ip44	4	380/390	12	1.80

32.45.AR

Ø45
Diameter 45mm

机械限位内置接收型电机

Mechanical Limit Switch + Build-in Receiver Motor


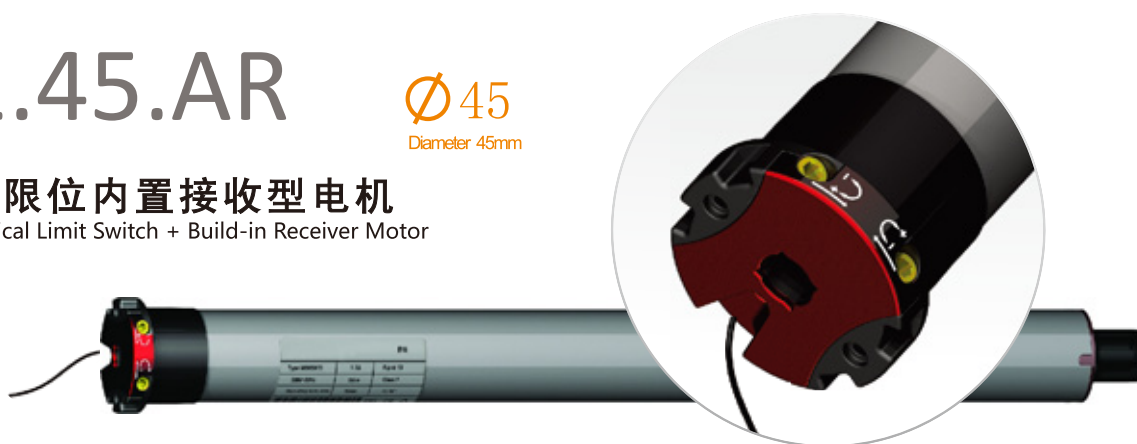


机械限位内置接收型

运行平稳，噪音低

Mechanical Limit Switch + Build-in Receiver

Balanced running, low noise

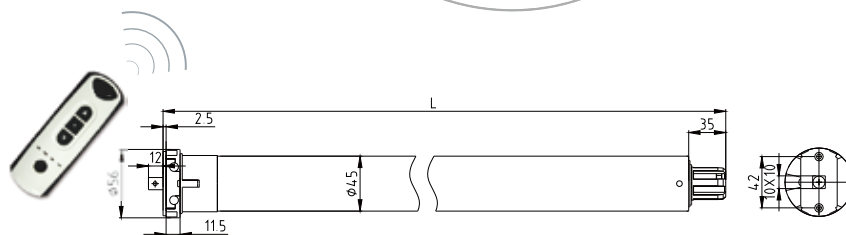

配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
32.45.AR.10	10	13	136	230	0.60	4	Ip44	570	40	2.30
32.45.AR.10	10	17	155	230	0.68	4	Ip44	570	40	2.35
32.45.AR.10	10	27	203	230	0.84	4	Ip44	570	40	2.45
32.45.AR.15	15	13	155	230	0.68	4	Ip44	570	40	2.33
32.45.AR.15	15	17	174	230	0.72	4	Ip44	570	40	2.40
32.45.AR.15	15	27	226	230	0.95	4	Ip44	570	40	2.50
32.45.AR.20	20	13	155	230	0.68	4	Ip44	570	40	2.35
32.45.AR.20	20	17	203	230	0.84	4	Ip44	570	40	2.45
32.45.AR.20	20	27	244	230	1.06	4	Ip44	570	40	2.65
32.45.AR.25	25	13	174	230	0.72	4	Ip44	570	40	2.40
32.45.AR.25	25	17	226	230	0.95	4	Ip44	570	40	2.50
32.45.AR.30	30	13	203	230	0.84	4	Ip44	570	40	2.45
32.45.AR.30	30	17	226	230	0.95	4	Ip44	570	40	2.50
32.45.AR.35	35	13	226	230	0.95	4	Ip44	570	40	2.47
32.45.AR.40	40	13	226	230	0.95	4	Ip44	570	40	2.50
32.45.AR.50	50	13	244	230	1.06	4	Ip44	570	40	2.65

110V/60Hz

32.45.AR.10	10	16	140	110	1.26	4	Ip44	570	40	2.30
32.45.AR.10	10	21	160	110	1.55	4	Ip44	570	40	2.35
32.45.AR.15	15	16	155	110	1.26	4	Ip44	570	40	2.33
32.45.AR.15	15	21	190	110	1.55	4	Ip44	570	40	2.40
32.45.AR.20	20	16	190	110	1.55	4	Ip44	570	40	2.35
32.45.AR.20	20	21	220	110	1.99	4	Ip44	570	40	2.45
32.45.AR.25	25	16	190	110	1.55	4	Ip44	570	40	2.40
32.45.AR.25	25	21	210	110	1.99	4	Ip44	570	40	2.50
32.45.AR.30	30	16	220	110	1.99	4	Ip44	570	40	2.45
32.45.AR.30	30	21	240	110	2.42	4	Ip44	570	40	2.50
32.45.AR.35	35	16	240	110	1.99	4	Ip44	570	40	2.47
32.45.AR.40	40	16	240	110	2.14	4	Ip44	570	40	2.50
32.45.AR.50	50	16	255	110	2.42	4	Ip44	570	40	2.65

32.45.ARE

Ø45
Diameter 45mm



电子限位内置接收型电机

Electronic Limit Switch + Build-in Receiver Motor



电子限位内置接收型，运行平稳，噪音低

发射器无线遥控设定限位，限位精确，可外接手动开关


Electronic Limit Switch + Build-in Receiver, Balanced running, low noise

Wireless set up the limits by outer emitter with high precision

Can connect with outer manual switch



配件选择 Mount Solutions

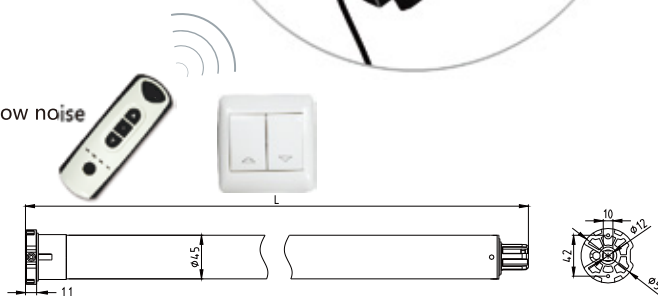

产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.ARE.10	10	13	136	230	0.60	4	Ip44	570	0~∞	2.30
32.45.ARE.10	10	17	155	230	0.68	4	Ip44	570	0~∞	2.35
32.45.ARE.10	10	27	203	230	0.84	4	Ip44	570	0~∞	2.45
32.45.ARE.15	15	13	155	230	0.68	4	Ip44	570	0~∞	2.33
32.45.ARE.15	15	17	174	230	0.72	4	Ip44	570	0~∞	2.40
32.45.ARE.15	15	27	226	230	0.95	4	Ip44	570	0~∞	2.50
32.45.ARE.20	20	13	155	230	0.68	4	Ip44	570	0~∞	2.35
32.45.ARE.20	20	17	203	230	0.84	4	Ip44	570	0~∞	2.45
32.45.ARE.20	20	27	244	230	1.06	4	Ip44	570	0~∞	2.65
32.45.ARE.25	25	13	174	230	0.72	4	Ip44	570	0~∞	2.40
32.45.ARE.25	25	17	226	230	0.95	4	Ip44	570	0~∞	2.50
32.45.ARE.30	30	13	203	230	0.84	4	Ip44	570	0~∞	2.45
32.45.ARE.30	30	17	226	230	0.95	4	Ip44	570	0~∞	2.50
32.45.ARE.35	35	13	226	230	0.95	4	Ip44	570	0~∞	2.47
32.45.ARE.40	40	13	226	230	0.95	4	Ip44	570	0~∞	2.50
32.45.ARE.50	50	13	244	230	1.06	4	Ip44	570	0~∞	2.65

110V/60Hz

32.45.ARE.10	10	16	140	110	1.26	4	Ip44	570	0~∞	2.30
32.45.ARE.10	10	21	160	110	1.55	4	Ip44	570	0~∞	2.35
32.45.ARE.15	15	16	155	110	1.26	4	Ip44	570	0~∞	2.33
32.45.ARE.15	15	21	190	110	1.55	4	Ip44	570	0~∞	2.40
32.45.ARE.20	20	16	190	110	1.55	4	Ip44	570	0~∞	2.35
32.45.ARE.20	20	21	220	110	1.99	4	Ip44	570	0~∞	2.45
32.45.ARE.25	25	16	190	110	1.55	4	Ip44	570	0~∞	2.40
32.45.ARE.25	25	21	220	110	1.99	4	Ip44	570	0~∞	2.50
32.45.ARE.30	30	16	220	110	1.99	4	Ip44	570	0~∞	2.45
32.45.ARE.30	30	21	240	110	2.42	4	Ip44	570	0~∞	2.50
32.45.ARE.35	35	16	240	110	1.99	4	Ip44	570	0~∞	2.47
32.45.ARE.40	40	16	240	110	2.14	4	Ip44	570	0~∞	2.50
32.45.ARE.50	50	16	255	110	2.42	4	Ip44	570	0~∞	2.65

32.45.AC

Ø45
Diameter 45mm

机械限位带离合型电机

Clutch Type, Mechanical Limit Switch+Clutch Motor



机械限位带离合型

运行平稳，噪音低

停电配合扭簧打开门窗

Clutch Type, Mechanical Limit Switch+Clutch

Balanced running, low noise


Work with the clutch and spring to open the doors or shutters during power failure



Roller Door
卷帘门



Spring 扭簧

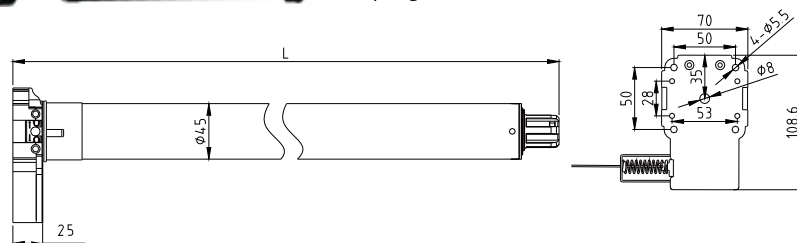

配件选择 Mount Solutions



产品认证 Product Certificate




Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.AC.40	40	13	226	230	0.95	4	Ip44	620	27	3.30
32.45.AC.50	50	13	244	230	1.06	4	Ip44	620	27	3.45
110V/60Hz										
32.45.AC.40	40	16	240	110	2.14	4	Ip44	620	27	3.30
32.45.AC.50	50	16	255	110	2.42	4	Ip44	620	27	3.45

32.45.AM-A Ø45

Diameter 45mm

手摇电机-A型

Manual Motor Type A

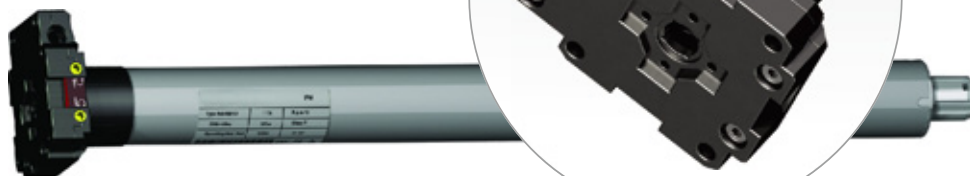



手摇型，机械限位，运行平稳，噪音低

停电时，可手摇电机运行

Manual Type, Mechanical Limit Switch+Manual Override

Balanced running, low noise

Work with handcrank during power failure

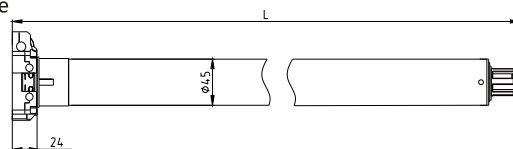

配件选择 Mount Solutions



产品认证 Product Certificate




Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maximum Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.AM.10A	10	13	136	230	0.60	4	Ip44	620	27	2.95
32.45.AM.10A	10	17	155	230	0.68	4	Ip44	620	27	2.98
32.45.AM.15A	15	13	155	230	0.68	4	Ip44	620	27	2.98
32.45.AM.15A	15	17	174	230	0.72	4	Ip44	620	27	3.05
32.45.AM.20A	20	13	155	230	0.68	4	Ip44	620	27	3.00
32.45.AM.20A	20	17	203	230	0.84	4	Ip44	620	27	3.10
32.45.AM.25A	25	13	174	230	0.72	4	Ip44	620	27	3.05
32.45.AM.25A	25	17	226	230	0.95	4	Ip44	620	27	3.12
32.45.AM.30A	30	13	203	230	0.84	4	Ip44	620	27	3.10
32.45.AM.30A	30	17	226	230	0.95	4	Ip44	620	27	3.12
32.45.AM.35A	35	13	226	230	0.95	4	Ip44	620	27	3.12
32.45.AM.40A	40	13	226	230	0.95	4	Ip44	620	27	3.00
32.45.AM.50A	50	13	244	230	1.06	4	Ip44	620	27	3.30
110V/60Hz										
32.45.AM.10A	10	16	140	110	1.26	4	Ip44	620	27	2.95
32.45.AM.10A	10	21	160	110	1.55	4	Ip44	620	27	2.98
32.45.AM.15A	15	16	155	110	1.26	4	Ip44	620	27	2.98
32.45.AM.15A	15	21	190	110	1.55	4	Ip44	620	27	3.05
32.45.AM.20A	20	16	190	110	1.55	4	Ip44	620	27	3.00
32.45.AM.20A	20	21	220	110	1.99	4	Ip44	620	27	3.10
32.45.AM.25A	25	16	190	110	1.55	4	Ip44	620	27	3.05
32.45.AM.25A	25	21	220	110	1.99	4	Ip44	620	27	3.12
32.45.AM.30A	30	16	220	110	1.99	4	Ip44	620	27	3.10
32.45.AM.30A	30	21	240	110	2.42	4	Ip44	620	27	3.12
32.45.AM.35A	35	16	240	110	1.99	4	Ip44	620	27	3.12
32.45.AM.40A	40	16	240	110	2.14	4	Ip44	620	27	3.00
32.45.AM.50A	50	16	255	110	2.42	4	Ip44	620	27	3.30

32.45.AM-B Ø45

Ø45
Diameter 45mm

手摇电机-B型 Manual Motor Type B

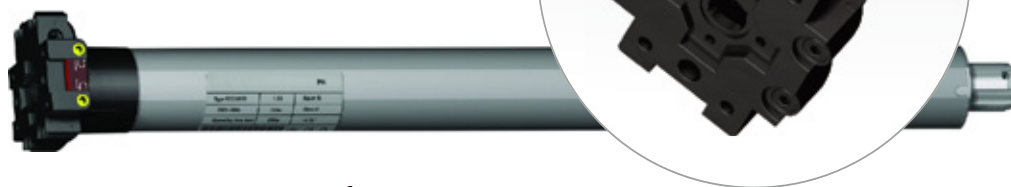

手摇型, 运行平稳, 噪音低

停电时, 可手摇电机运行

电机头部小, 广泛应用于遮阳棚



Manual Type, Mechanical Limit Switch+Manual Override

Balanced running, low noise,

Work with handcrank during power failure.

With small head, widely used in awnings

配件选择 Mount Solutions



产品认证 Product Certificate




Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maximum Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.AM.10B	10	13	136	230	0.60	4	Ip44	620	27	2.80
32.45.AM.10B	10	17	155	230	0.68	4	Ip44	620	27	2.82
32.45.AM.15B	15	13	155	230	0.68	4	Ip44	620	27	2.82
32.45.AM.15B	15	17	174	230	0.72	4	Ip44	620	27	2.90
32.45.AM.20B	20	13	155	230	0.68	4	Ip44	620	27	2.85
32.45.AM.20B	20	17	203	230	0.84	4	Ip44	620	27	2.95
32.45.AM.25B	25	13	174	230	0.72	4	Ip44	620	27	2.90
32.45.AM.25B	25	17	226	230	0.95	4	Ip44	620	27	2.97
32.45.AM.30B	30	13	203	230	0.84	4	Ip44	620	27	2.95
32.45.AM.30B	30	17	226	230	0.95	4	Ip44	620	27	2.97
32.45.AM.35B	35	13	226	230	0.95	4	Ip44	620	27	2.97
32.45.AM.40B	40	13	226	230	0.95	4	Ip44	620	27	2.97
32.45.AM.50B	45	13	244	230	1.06	4	Ip44	620	27	3.15
110V/60Hz										
32.45.AM.10B	10	16	140	110	1.26	4	Ip44	620	27	2.80
32.45.AM.10B	10	21	160	110	1.55	4	Ip44	620	27	2.82
32.45.AM.15B	15	16	155	110	1.26	4	Ip44	620	27	2.82
32.45.AM.15B	15	21	190	110	1.55	4	Ip44	620	27	2.90
32.45.AM.20B	20	16	190	110	1.55	4	Ip44	620	27	2.85
32.45.AM.20B	20	21	220	110	1.99	4	Ip44	620	27	2.95
32.45.AM.25B	25	16	190	110	1.55	4	Ip44	620	27	2.90
32.45.AM.25B	25	21	220	110	1.99	4	Ip44	620	27	2.97
32.45.AM.30B	30	16	220	110	1.99	4	Ip44	620	27	2.95
32.45.AM.30B	30	21	240	110	2.42	4	Ip44	620	27	2.97
32.45.AM.35B	35	16	240	110	1.99	4	Ip44	620	27	2.97
32.45.AM.40B	40	16	240	110	2.14	4	Ip44	620	27	2.97
32.45.AM.50B	45	16	255	110	2.42	4	Ip44	620	27	3.15

32.45.AMR-A Ø45

Diameter 45mm

机械限位内置接收型手摇电机-A型

Mechanical Limit Switch + Build-in Receiver Manual Motor Type A

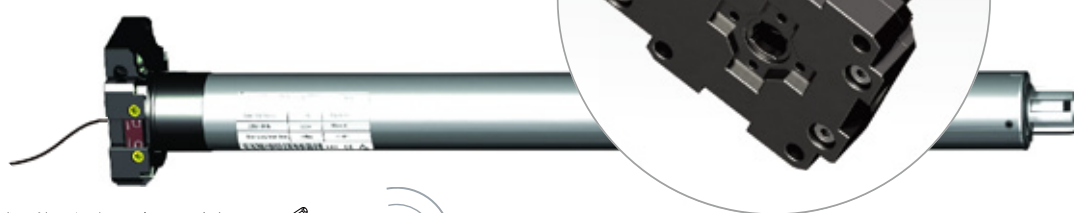



手摇内置接收型，机械限位，运行平稳，噪音低
停电时，可手摇电机运行

Manual & Build-in Receiver Type

Mechanical Limit Switch + Manual Override

Balanced running, low noise

Work with handcrank during power failure

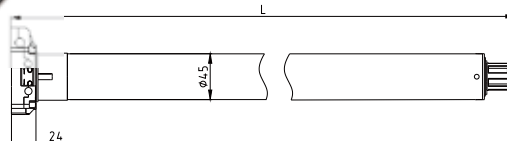

配件选择 Mount Solutions



产品认证 Product Certificate




Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maximum Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.AMR.10A	10	13	136	230	0.60	4	Ip44	740	27	3.45
32.45.AMR.10A	10	17	155	230	0.68	4	Ip44	740	27	3.48
32.45.AMR.15A	15	13	155	230	0.68	4	Ip44	740	27	3.48
32.45.AMR.15A	15	17	174	230	0.72	4	Ip44	740	27	3.55
32.45.AMR.20A	20	13	155	230	0.68	4	Ip44	740	27	3.50
32.45.AMR.20A	20	17	203	230	0.84	4	Ip44	740	27	3.60
32.45.AMR.25A	25	13	174	230	0.72	4	Ip44	740	27	3.55
32.45.AMR.25A	25	17	226	230	0.95	4	Ip44	740	27	3.62
32.45.AMR.30A	30	13	203	230	0.84	4	Ip44	740	27	3.60
32.45.AMR.30A	30	17	226	230	0.95	4	Ip44	740	27	3.62
32.45.AMR.35A	35	13	226	230	0.95	4	Ip44	740	27	3.62
32.45.AMR.40A	40	13	226	230	0.95	4	Ip44	740	27	3.62
32.45.AMR.50A	50	13	244	230	1.06	4	Ip44	740	27	3.80
110V/60Hz										
32.45.AMR.10A	10	16	140	110	1.26	4	Ip44	740	27	3.45
32.45.AMR.10A	10	21	160	110	1.55	4	Ip44	740	27	3.48
32.45.AMR.15A	15	16	155	110	1.26	4	Ip44	740	27	3.48
32.45.AMR.15A	15	21	190	110	1.55	4	Ip44	740	27	3.55
32.45.AMR.20A	20	16	190	110	1.55	4	Ip44	740	27	3.50
32.45.AMR.20A	20	21	220	110	1.99	4	Ip44	740	27	3.60
32.45.AMR.25A	25	16	190	110	1.55	4	Ip44	740	27	3.55
32.45.AMR.25A	25	21	220	110	1.99	4	Ip44	740	27	3.62
32.45.AMR.30A	30	16	220	110	1.99	4	Ip44	740	27	3.60
32.45.AMR.30A	30	21	240	110	2.42	4	Ip44	740	27	3.62
32.45.AMR.35A	35	16	240	110	1.99	4	Ip44	740	27	3.62
32.45.AMR.40A	40	16	240	110	2.14	4	Ip44	740	27	3.62
32.45.AMR.50A	50	16	255	110	2.42	4	Ip44	740	27	3.80

32.45.AMR-B Ø45

Diameter 45mm

机械限位内置接收型手摇电机-B型

Mechanical Limit Switch + Build-in Receiver Manual Motor Type B

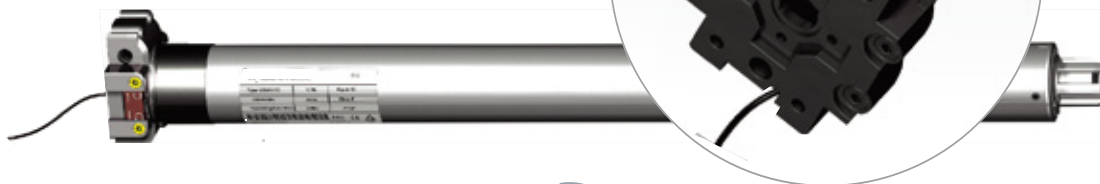

手摇内置接收型，机械限位，运行平稳，噪音低，

停电时，可手摇电机运行

电机头部小，广泛应用于遮阳棚


Manual & Build-in Receiver Type

Mechanical Limit Switch + Manual Override


Balanced running, low noise

Work with handcrank during power failure

With small head, widely used in awnings

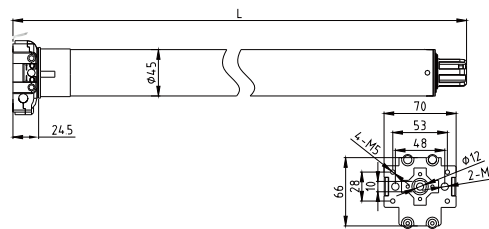

配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.45.AMR.10B	10	13	136	230	0.60	4	Ip44	740	27	3.30
32.45.AMR.10B	10	17	155	230	0.68	4	Ip44	740	27	3.33
32.45.AMR.15B	15	13	155	230	0.68	4	Ip44	740	27	3.33
32.45.AMR.15B	15	17	174	230	0.72	4	Ip44	740	27	3.40
32.45.AMR.20B	20	13	155	230	0.68	4	Ip44	740	27	3.35
32.45.AMR.20B	20	17	203	230	0.84	4	Ip44	740	27	3.45
32.45.AMR.25B	25	13	174	230	0.72	4	Ip44	740	27	3.40
32.45.AMR.25B	25	17	226	230	0.95	4	Ip44	740	27	3.47
32.45.AMR.30B	30	13	203	230	0.84	4	Ip44	740	27	3.45
32.45.AMR.30B	30	17	226	230	0.95	4	Ip44	740	27	3.47
32.45.AMR.35B	35	13	226	230	0.95	4	Ip44	740	27	3.47
32.45.AMR.40B	40	13	226	230	0.95	4	Ip44	740	27	3.47
32.45.AMR.50B	45	13	244	230	1.06	4	Ip44	740	27	3.65
110V/60Hz										
32.45.AMR.10B	10	16	140	110	1.26	4	Ip44	740	27	3.30
32.45.AMR.10B	10	21	160	110	1.55	4	Ip44	740	27	3.33
32.45.AMR.15B	15	16	155	110	1.26	4	Ip44	740	27	3.33
32.45.AMR.15B	15	21	190	110	1.55	4	Ip44	740	27	3.40
32.45.AMR.20B	20	16	190	110	1.55	4	Ip44	740	27	3.35
32.45.AMR.20B	20	21	220	110	1.99	4	Ip44	740	27	3.45
32.45.AMR.25B	25	16	190	110	1.55	4	Ip44	740	27	3.40
32.45.AMR.25B	25	21	220	110	1.99	4	Ip44	740	27	3.47
32.45.AMR.30B	30	16	220	110	1.99	4	Ip44	740	27	3.45
32.45.AMR.30B	30	21	240	110	2.42	4	Ip44	740	27	3.47
32.45.AMR.35B	35	16	240	110	1.99	4	Ip44	740	27	3.47
32.45.AMR.40B	40	16	240	110	2.14	4	Ip44	740	27	3.47
32.45.AMR.50B	45	16	255	110	2.42	4	Ip44	740	27	3.65

32.59.AS

Ø59
Diameter 59mm

标准型电机
Standard Type Motor





标准型，机械限位

运行平稳，噪音低

Standard Type, Mechanical Limit Switch

Balanced running, low noise

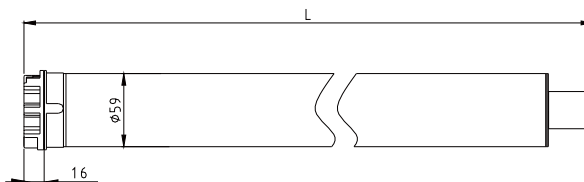

配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maximum Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.59.AS.60	60	12	315	230	1.40	4	Ip44	560	27	4.79
32.45.AS.80	80	12	360	230	1.60	4	Ip44	560	27	4.80
32.45.AS.100	100	12	444	230	2.00	4	Ip44	560	27	4.80
32.45.AS.120	120	9	444	230	2.00	4	Ip44	560	27	4.81
110V/60Hz										
32.59.AS.60	60	15	320	110	3.36	4	Ip44	560	27	4.79
32.45.AS.80	80	15	360	110	4.18	4	Ip44	560	27	4.80
32.45.AS.100	100	15	450	110	4.31	4	Ip44	560	27	4.80
32.45.AS.120	120	11	450	110	4.31	4	Ip44	560	27	4.81

32.59.AR

Ø59

Diameter 59mm

机械限位内置接收型电机

Mechanical Limit Switch + Build-in Receiver Motor





机械限位内置接收型

运行平稳，噪音低

Mechanical Limit Switch+Build-in Receiver

Balanced running, low noise

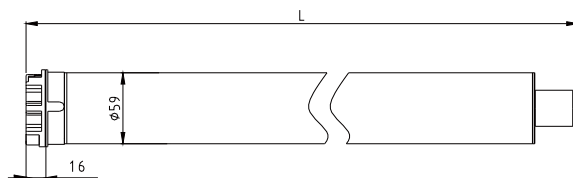

配件选择 Mount Solutions



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.59.AR.60	60	12	315	230	1.40	4	Ip44	680	27	4.74
32.45.AR.80	80	12	360	230	1.60	4	Ip44	680	27	4.75
32.45.AR.100	100	12	444	230	2.00	4	Ip44	680	27	4.75
32.45.AR.120	120	9	444	230	2.00	4	Ip44	680	27	4.76
110V/60Hz										
32.59.AR.60	60	15	320	110	3.36	4	Ip44	680	27	4.74
32.45.AR.80	80	15	360	110	4.18	4	Ip44	680	27	4.75
32.45.AR.100	100	15	450	110	4.31	4	Ip44	680	27	4.75
32.45.AR.120	120	11	450	110	4.31	4	Ip44	680	27	4.76

32.59.AM

Ø59
Diameter 59mm

手摇型电机
Manual Motor



手摇型，机械限位




运行平稳，噪音低

停电时，可手摇电机运行

Manual Type, Mechanical Limit Switch+Manual Override

Balanced running, low noise

Work with handcrank during power failure

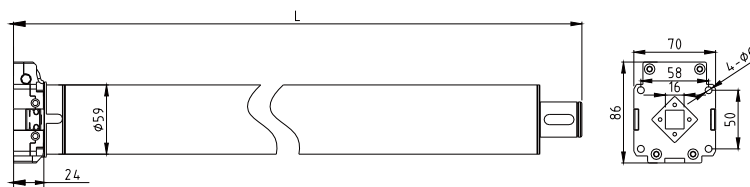

配件选择 Mount Solutions



产品认证 Product Certificate






Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.59.AM.60	60	12	315	230	1.40	4	Ip44	640	27	6.14
32.59.AM.80	80	12	360	230	1.60	4	Ip44	640	27	6.15
32.59.AM.100	100	12	444	230	2.00	4	Ip44	640	27	6.15
32.59.AM.120	120	9	444	230	2.00	4	Ip44	640	27	6.16
110V/60Hz										
32.59.AM.60	60	15	320	110	3.36	4	Ip44	640	27	6.14
32.59.AM.80	80	15	360	110	4.18	4	Ip44	640	27	6.15
32.59.AM.100	100	15	450	110	4.31	4	Ip44	640	27	6.15
32.59.AM.120	120	11	450	110	4.31	4	Ip44	640	27	6.16

32.92.AS

Ø92
Diameter 92mm

标准型电机
Standard Type Motor

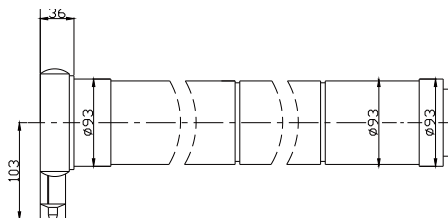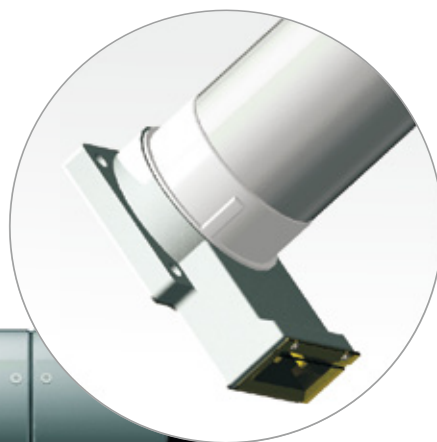

标准型，机械限位
运行平稳，噪音低
Standard Type, Mechanical Limit Switch
Balanced running, low noise



Roller Door
卷闸门

产品认证 Product Certificate





Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.92.AS.140	140	12	680	230	3.00	4	Ip44	560	16	12.45
32.92.AS.180	180	12	680	230	3.00	4	Ip44	560	16	12.45
32.92.AS.230	230	12	680	230	3.00	4	Ip44	560	16	12.45
32.92.AS.300	300	6	680	230	3.00	4	Ip44	560	16	12.45
110V/60Hz										
32.92.AS.140	140	15	680	110	5.46	4	Ip44	560	16	12.45
32.92.AS.180	180	15	680	110	6.51	4	Ip44	560	16	12.45
32.92.AS.230	230	15	680	110	7.56	4	Ip44	560	16	12.45
32.92.AS.300	300	8	680	110	7.56	4	Ip44	560	16	12.45

32.92.AM

Ø92
Diameter 92mm

手摇型电机
Manual Motor

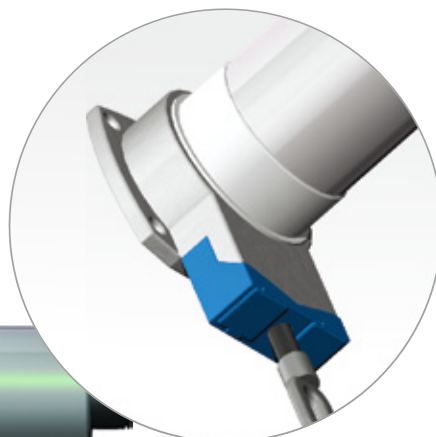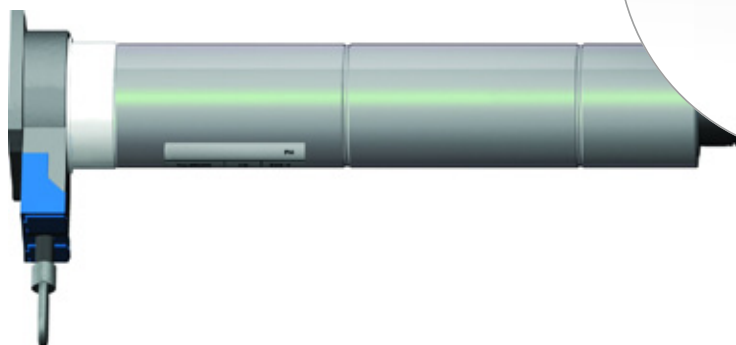

手摇型，机械限位



运行平稳，噪音低

停电时，可手摇电机运行

Manual Type, Mechanical Limit Switch+Manual Override

Balanced running, low noise

Work with handcrank during power failure



产品认证 Product Certificate



Type型号	Rated Torque 额定扭矩 (N.m)	Output Speed 输出转速 (rpm)	Nominal Consumption 额定功率(W)	Nominal Voltage 额定电压(V)	Nominal Current 额定电流(A)	Running Time 连续工作时间 (min)	Protection Index 保护等级	Total Length 产品长度 (mm)	Maxium Turns 最大限位圈数 (Turn)	Net Weight 产品净重 (KG)
230V/50Hz										
32.92.AM.140	140	12	680	230	3.00	4	Ip44	560	16	13.5
32.92.AM.180	180	12	680	230	3.00	4	Ip44	560	16	13.5
32.92.AM.230	230	12	680	230	3.00	4	Ip44	560	16	13.5
32.92.AM.300	300	6	680	230	3.00	4	Ip44	560	16	13.5
110V/60Hz										
32.92.AM.140	140	15	680	110	5.46	4	Ip44	560	16	13.5
32.92.AM.180	180	15	680	110	6.51	4	Ip44	560	16	13.5
32.92.AM.230	230	15	680	110	7.56	4	Ip44	560	16	13.5
32.92.AM.300	300	8	680	110	7.56	4	Ip44	560	16	13.5




32.35.DS

Ø35
Diameter 35mm

标准型电机
Standard DC type Motor



标准型，机械限位
运行平稳，噪音低
Standard Type, Mechanical Limit Switch
Balanced running, low noise

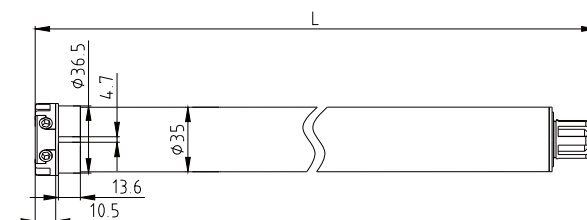

配件选择 Mount Solutions



产品认证 Product Certificate



Type	Rated Torque (N.m)	Current (A)	Power (W)	No load speed (rpm)	Working duty (S1)	Max. limit circles	IP
12V							
32.35.DS.03	3	1.7	20	20	continuous	38	IP44
32.35.DS.06	8	3.0	20	20	continuous	38	IP44
32.35.DS.10	10	3.3	20	20	continuous	38	IP44
24V							
32.35.DS.03	3	0.8	20	20	continuous	38	IP44
32.35.DS.06	8	1.5	20	20	continuous	38	IP44
32.35.DS.10	10	1.9	20	20	continuous	38	IP44


32.45.DS

Ø45

Diameter 45mm

标准型电机

Standard DC type Motor


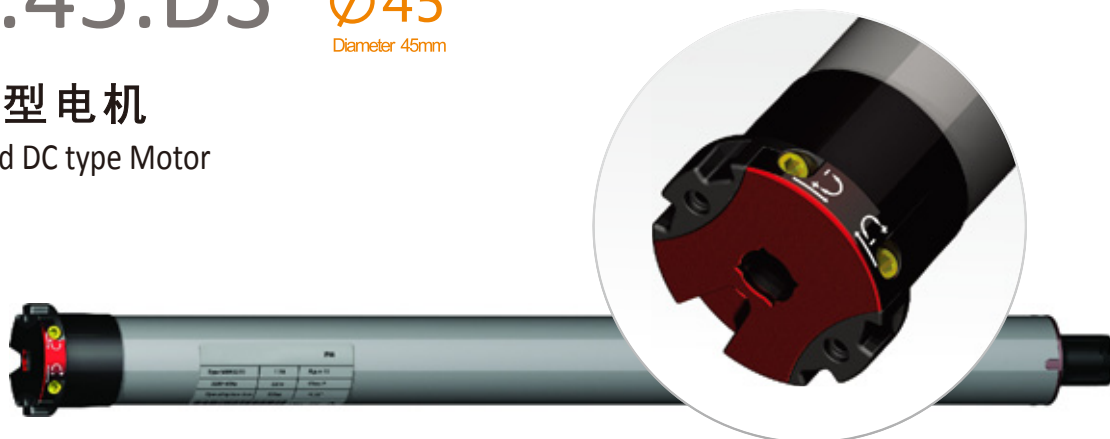


标准型，机械限位

运行平稳，噪音低

Standard Type, Mechanical Limit Switch

Balanced running, low noise



配件选择 Mount Solutions



产品认证 Product Certificate



Type	Rated Torque (N.m)	Current (A)	Power (W)	No load speed (rpm)	Working duty (S1)	Max. limit circles	IP
12V							
32.45.DS.10	10	4.2	50	20	continuous	25	IP44
32.45.DS.15	15	5.4	65	20	continuous	25	IP44
32.45.DS.20	20	6.7	80	20	continuous	25	IP44
24V							
32.45.DS.10	10	2.0	20	20	continuous	25	IP44
32.45.DS.15	15	2.7	20	20	continuous	25	IP44
32.45.DS.20	20	3.3	20	20	continuous	25	IP44

Accessories


配件




Crown Drive Adapter

皇冠驱动轮


皇冠驱动轮A2305
Ø35




皇冠驱动轮A2306
Ø35

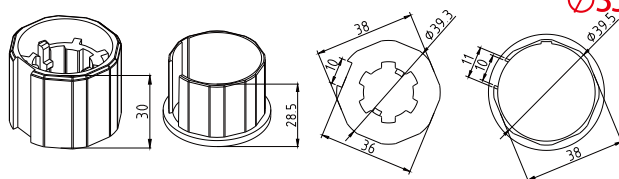


皇冠驱动轮A2307
Ø35

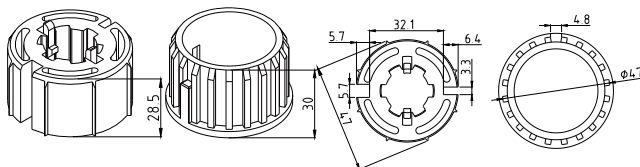


皇冠驱动轮A2308
Ø35

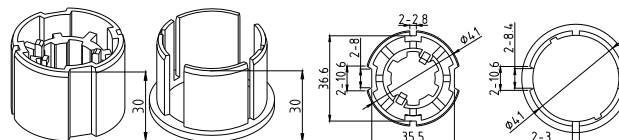


皇冠驱动轮A2309
Ø35

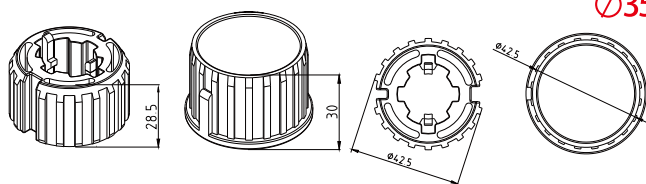


皇冠驱动轮A2401
Ø45

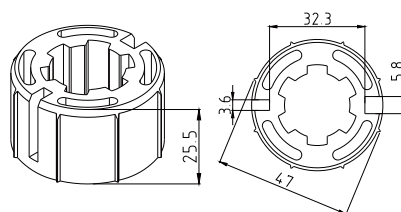


皇冠驱动轮A2402
Ø45

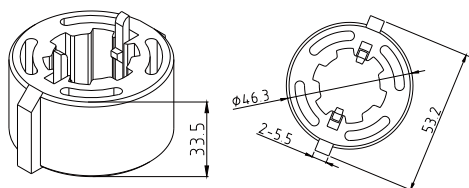


皇冠驱动轮A2403
Ø45

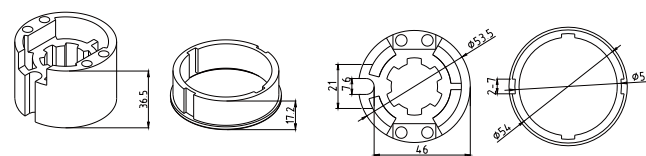


皇冠驱动轮A2404
Ø45

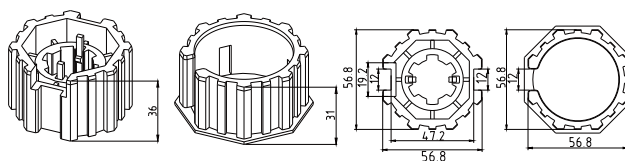


皇冠驱动轮A2406
Ø45

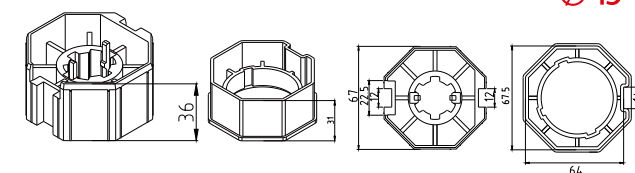

皇冠驱动轮A2407
Ø45

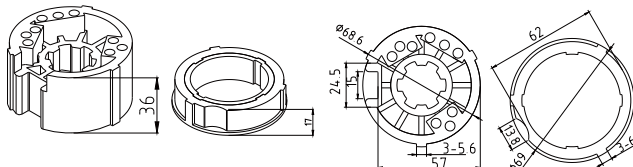


皇冠驱动轮A2408
Ø45

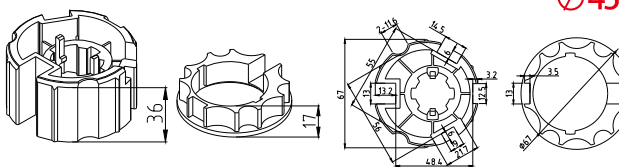


Crown Drive Adapter

皇冠驱动轮

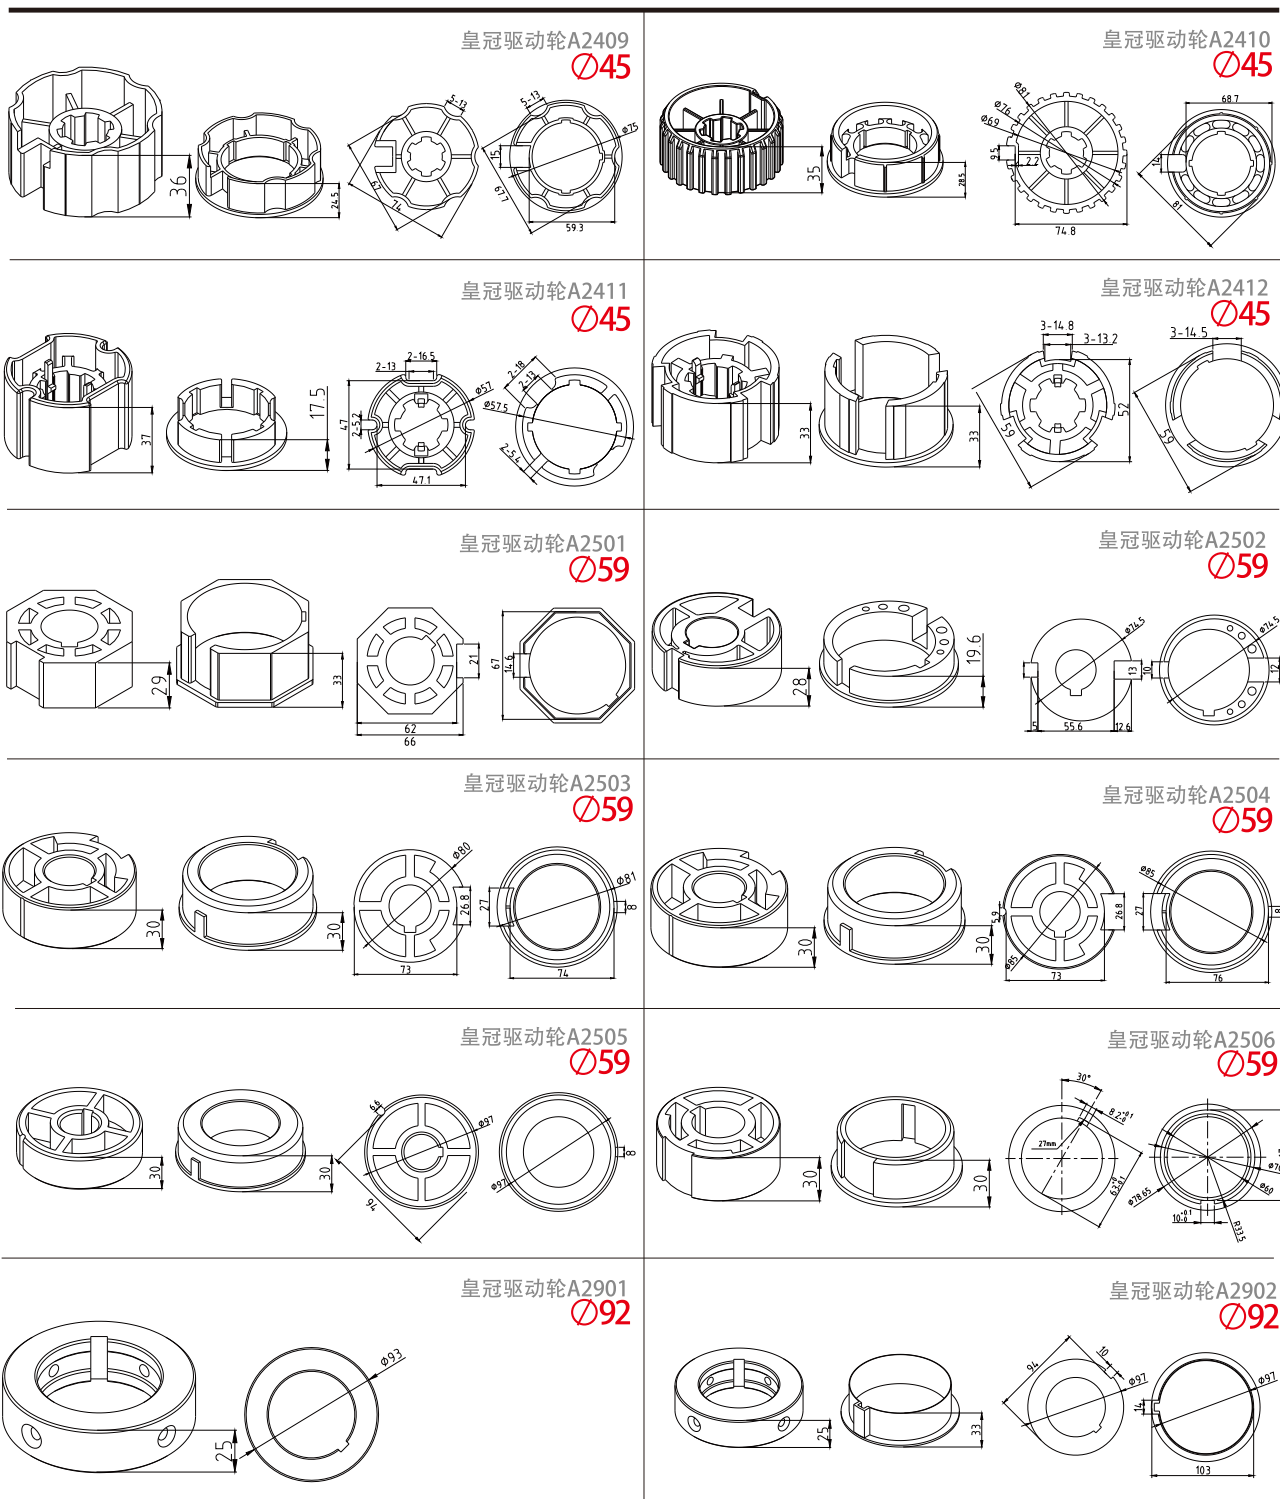


Idler 尾塞


尾塞/idler A1002

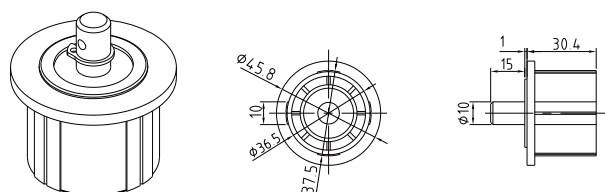


尾塞/idler A1003

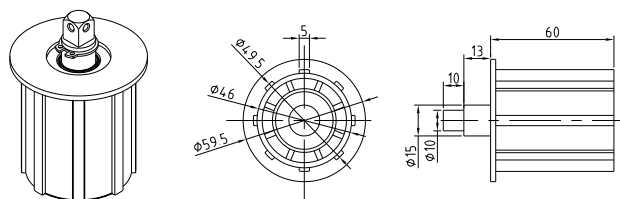


尾塞/idler A1004

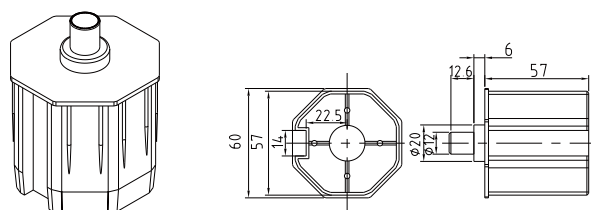


尾塞/idler A1005

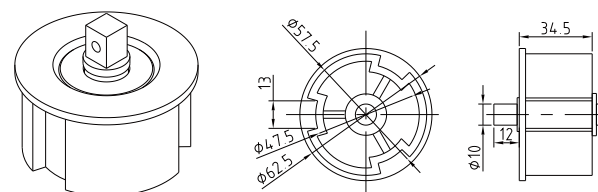


尾塞/idler A1006

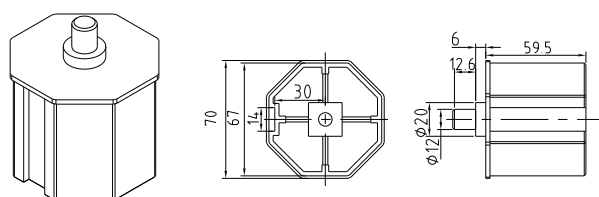


尾塞/idler A1007

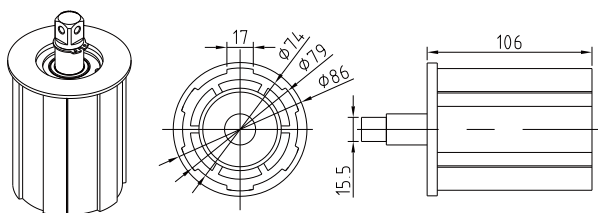













尾塞/idler A1008

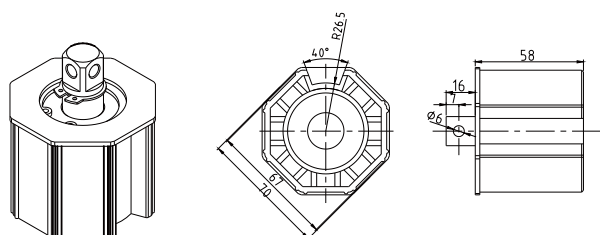

尾塞/idler A1009

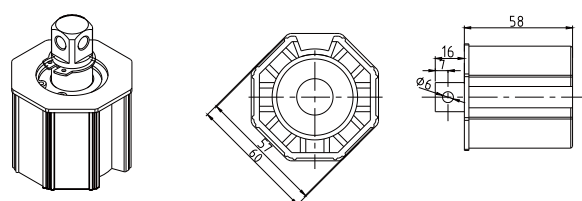


Brackets

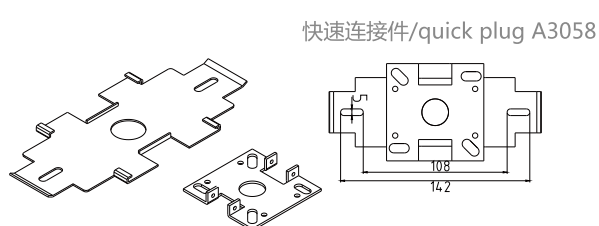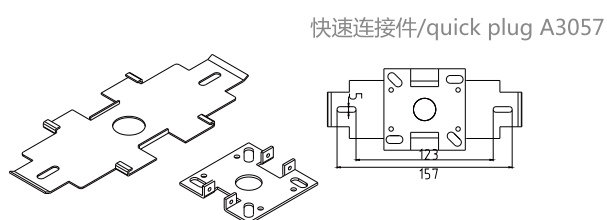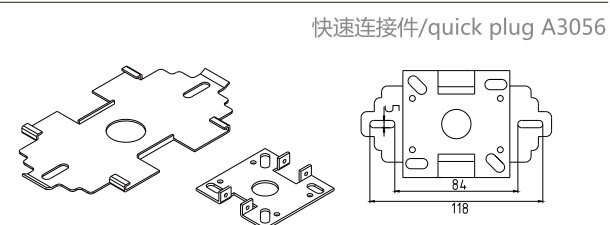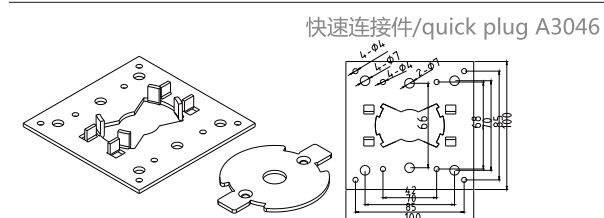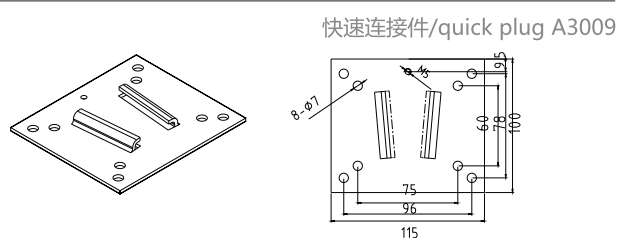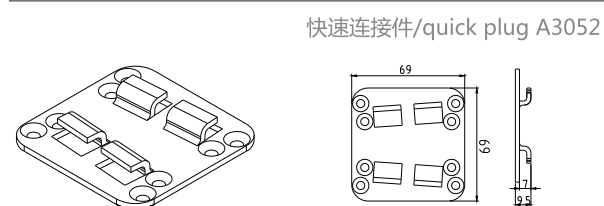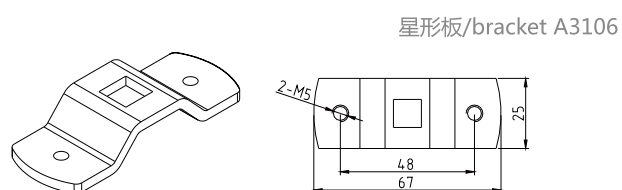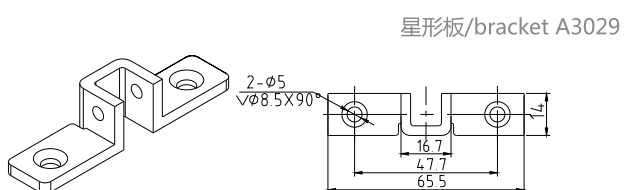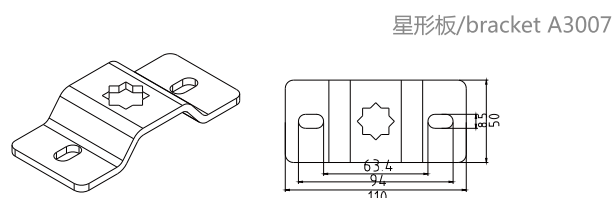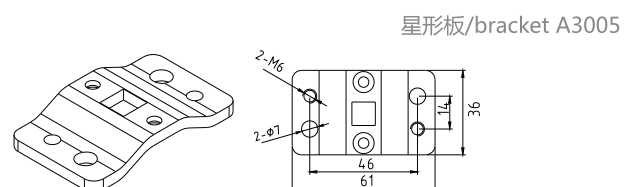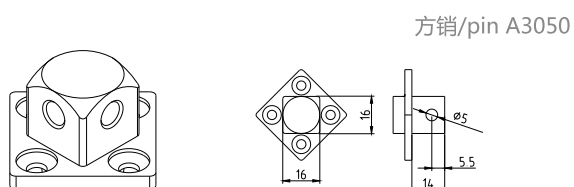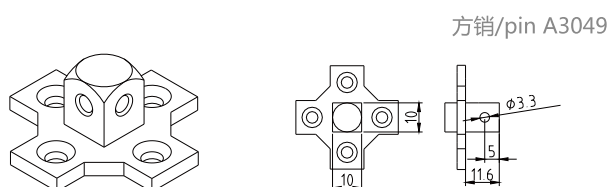


Brackets 支架


快速连接件/quick plug A3044

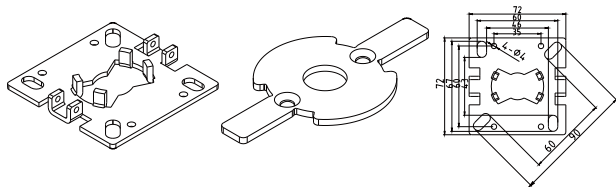


快速连接件/quick plug A3045

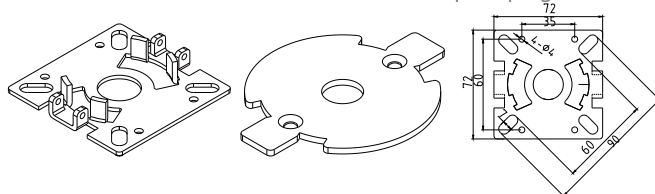


快速连接件/quick plug A3067

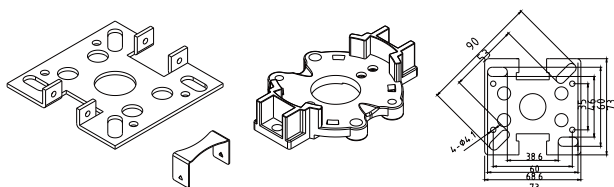

端板/wall plate A3030

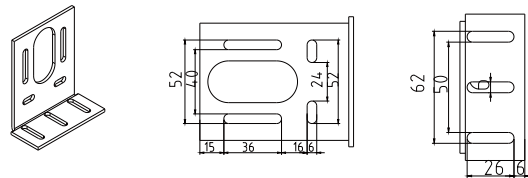

端板/wall plate A3032

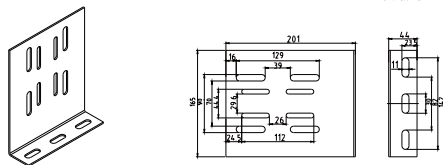

尾塞支架/bracket A3028



尾塞支架/bracket A3043



中连/middle support A3001



中连/middle support A3003



转把 eye outlet A3047



A	100mm
B	300mm



欲了解更多关于我们的产品，如卷帘窗产品，
门类产品，门类设备等。请点击我们的网站。

www.dafayard.com

Need any help or want to know more ,
please feel free to contact us or browse
our website :

www.dafayard.com

Tel: 0086-579-87540629

Fax:0086-579-87381229

Add: Huanwu Industrial Zone, Yongkang, China

E-mail:info@dafayard.com;

tony-yk01@hotmail.com

COMPANY
WITH QUALITY SYSTEM
CERTIFIED BY
=ISO 9001/2000=